

Performances (For a louver of 1219 x 1219 mm)

Percentage of free area	48,88 %
Free area	7,82 sq.ft. (0,726 m²)
Water penetration @ 0,010 oz/sq.ft.(3,05 gr/m²) =	to be determined
Free area intake velocity @ Pressure drop 0,15 in. H ₂ O (3,81 mm H ₂ O) =	to be determined


Standard specifications

Material	Aluminum 6063-T5
Depth	38,1 mm (1,50")
Blade thickness	1,60 mm (0,063")
"L" frame thickness	2,06 mm (0,081")
"U" frame thickness	1,83 mm (0,072")
Blades angle	35°
Center to center	25,4 mm (1")
Birdscreen	Galvanized steel
Finish	Mill finish
Assembly	Mechanical
Hardware	Galvanized steel
Approximate weight	3,19 lbs/sq.ft.
Dimensions maximales	1830 x 2438 mm



Pressure drop

(to be determined)

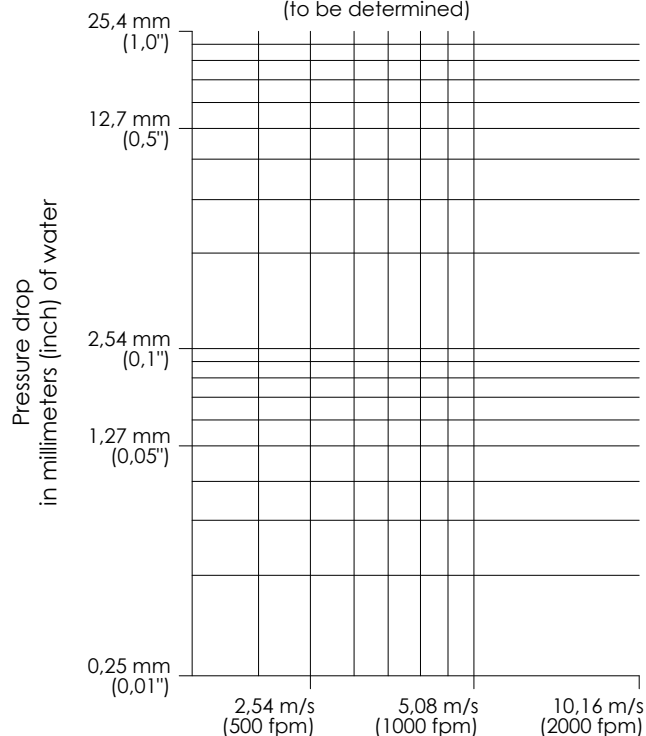

Air velocity through free area
meter per second (feet per minute)

Free areas table (sq.ft. & m²)

Louver width

po	12	18	24	30	36	42	48	54	60	66	72
m	0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	1.83
12	0.43	0.66	0.89	1.12	1.29	1.52	1.75	1.98	2.22	2.45	2.68
0.30	0.040	0.061	0.083	0.104	0.120	0.142	0.163	0.184	0.206	0.227	0.249
18	0.68	1.04	1.41	1.77	2.04	2.40	2.77	3.13	3.49	3.85	4.22
0.46	0.063	0.097	0.131	0.164	0.190	0.223	0.257	0.291	0.324	0.358	0.392
24	0.93	1.42	1.92	2.41	2.79	3.28	3.78	4.27	4.77	5.26	5.76
0.61	0.086	0.132	0.178	0.224	0.259	0.305	0.351	0.397	0.443	0.489	0.535
30	1.18	1.80	2.43	3.06	3.53	4.16	4.79	5.41	6.04	6.67	7.30
0.76	0.109	0.168	0.226	0.284	0.328	0.386	0.445	0.503	0.561	0.620	0.678
36	1.43	2.19	2.95	3.71	4.28	5.04	5.80	6.56	7.32	8.08	8.84
0.91	0.132	0.203	0.274	0.344	0.397	0.468	0.539	0.609	0.680	0.750	0.821
42	1.67	2.57	3.46	4.35	5.02	5.91	6.81	7.70	8.59	9.49	10.38
1.07	0.156	0.238	0.321	0.404	0.467	0.549	0.632	0.715	0.798	0.881	0.964
48	1.92	2.95	3.97	5.00	5.77	6.79	7.82	8.84	9.87	10.89	11.92
1.22	0.179	0.274	0.369	0.464	0.536	0.631	0.726	0.822	0.917	1.012	1.107
54	2.17	3.33	4.49	5.64	6.51	7.67	8.83	9.99	11.14	12.30	13.46
1.37	0.202	0.309	0.417	0.524	0.605	0.713	0.820	0.928	1.035	1.143	1.250
60	2.42	3.71	5.00	6.29	7.26	8.55	9.84	11.13	12.42	13.71	15.00
1.52	0.225	0.345	0.465	0.584	0.674	0.794	0.914	1.034	1.154	1.274	1.394
66	2.67	4.09	5.51	6.94	8.00	9.43	10.85	12.27	13.69	15.12	16.54
1.68	0.248	0.380	0.512	0.644	0.744	0.876	1.008	1.140	1.272	1.404	1.537
72	2.92	4.47	6.03	7.58	8.75	10.30	11.86	13.41	14.97	16.53	18.08
1.83	0.271	0.415	0.560	0.704	0.813	0.957	1.102	1.246	1.391	1.535	1.680
78	3.16	4.85	6.54	8.23	9.49	11.18	12.87	14.56	16.25	17.93	19.62
1.98	0.294	0.451	0.608	0.764	0.882	1.039	1.196	1.352	1.509	1.666	1.823
84	3.41	5.23	7.05	8.87	10.24	12.06	13.88	15.70	17.52	19.34	21.16
2.13	0.317	0.486	0.655	0.824	0.951	1.120	1.290	1.459	1.628	1.797	1.966

Louver height

Specifications

Material	Aluminum 6063-T5
Blades	Thickness 1,60 mm (0,063")
L frame	Thickness 2,06 mm (0,081")
U frame	Thickness 1,83 mm (0,072")

Available frames

- ☐ "L" frame
- ☐ "U" frame
- ☐ Concealed mullion (not available)
- ☐ Exposed mullions(nested frames)

Available finish

- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating*
- ☐ Liquid super durable coating*
- ☐ Duranar baked enamel*
- ☐ Duranar XL baked enamel*
- ☐ Powder coating*

Color : _____

* Painted on surfaces visible from the outside only




Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Birdscreen frame
- ☐ Non-insulated obturating panel 0,8 mm [0,032"]
- ☐ Insulated obturating panel 50 mm [2"]

Finish : _____

Color : _____

☐ Others : _____

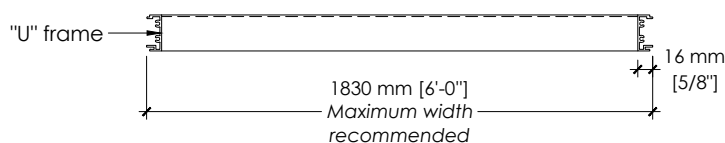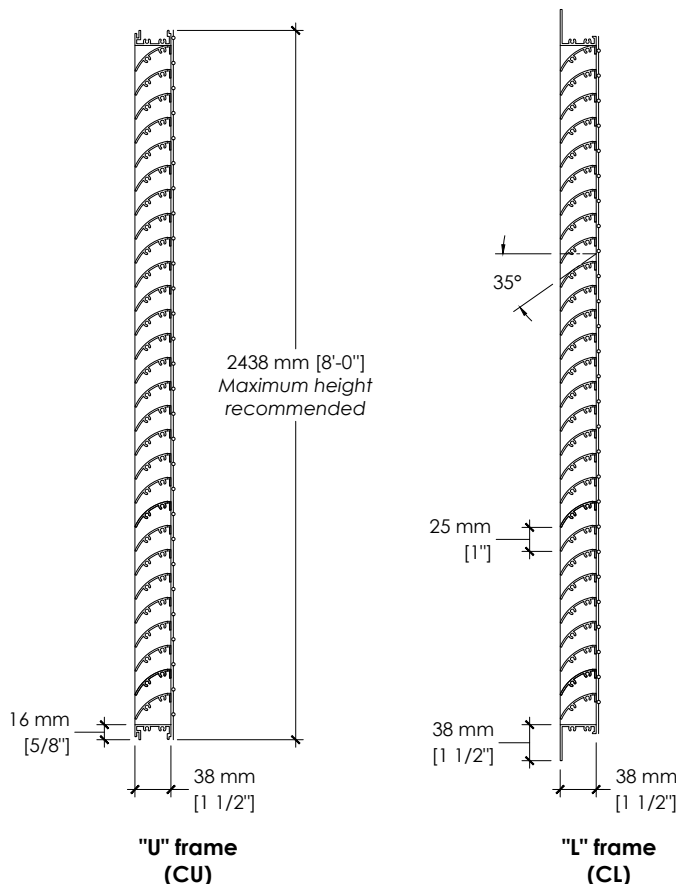

Project

Name : _____


Arch./Eng.: _____

Contractor : _____


OF / # PO : _____

Date : _____

Elevation (outside view)

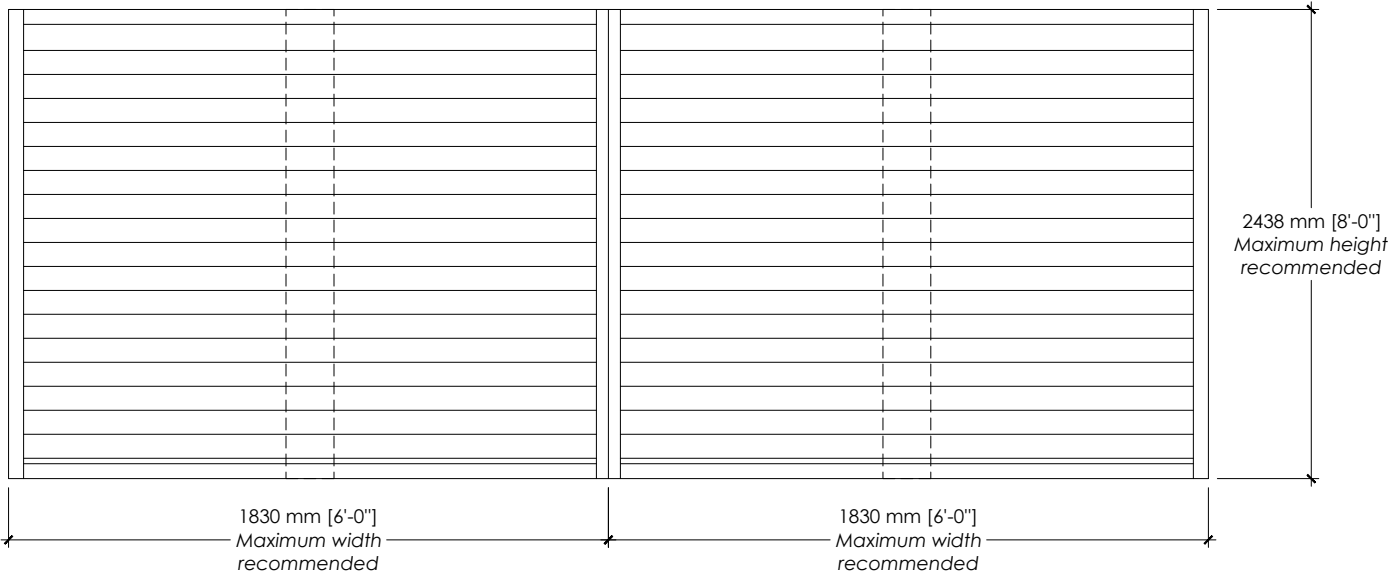


Section

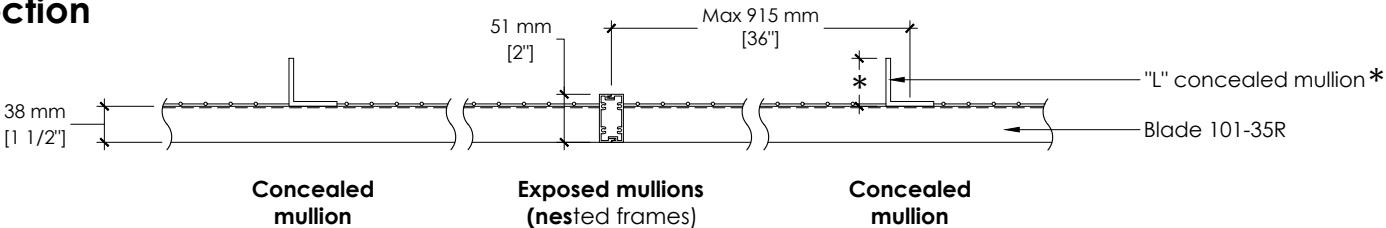


louver concealed mullion

For louvers more than 915 mm (36") wide, a supporting structure is needed behind the louver


		*Louver concealed mullion dimension
Louver height	Less than 2438 mm (96")	38 x 38 x 4,7 mm angle (1 1/2" x 1 1/2" x 3/16")
	from 2438 mm (96") to 3658 mm (144")	51 x 51 x 4,7 mm angle (2" x 2" x 3/16")
	more than 3658 mm (144")	Please see the engineering departement

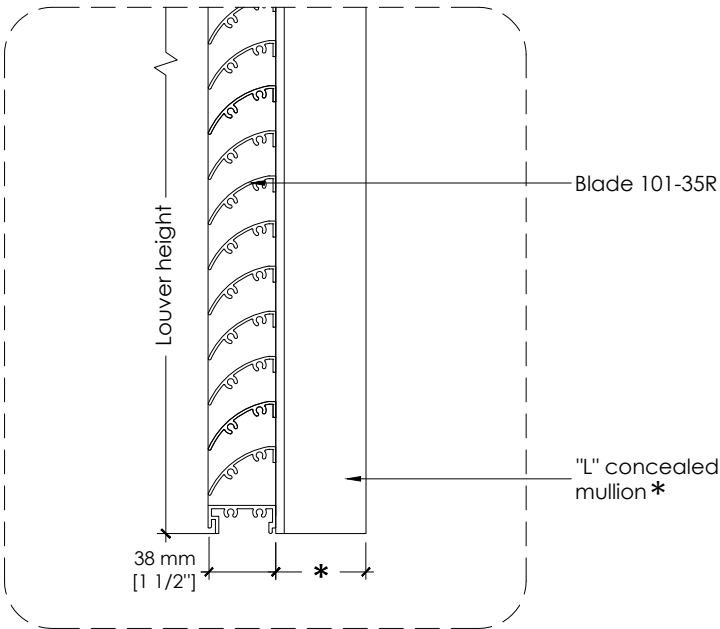


Shapes




☐ Rectangle / square




☐ Triangle





☐ Left triangle





☐ Right triangle



☐ Round

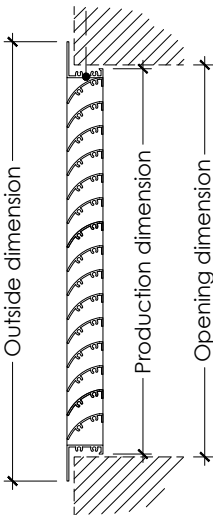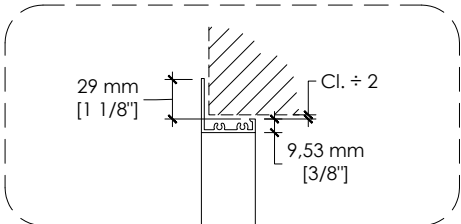

"L" frame (CL)

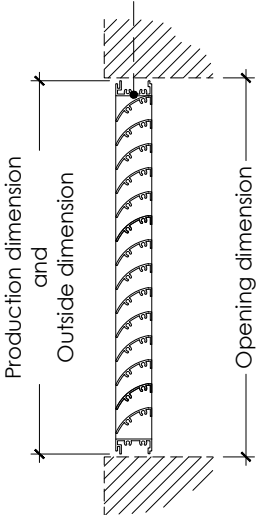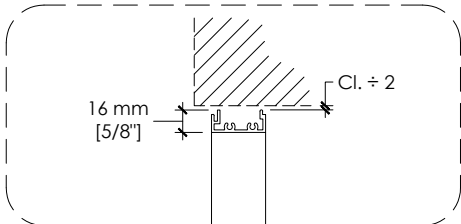

"U" frame (CU)

☐ Outside dimensions

☐ Opening dimensions

☐ Production dimensions

Item	Qty	Dimensions		Number of sections		Clearance (6 mm (1/4") minimum recommended)	Notes
		Width "A"	Height "B"	wide	High		