



Optional Framing


* Cometal requires that exact opening dimensions be provided. Factory will fabricate mats 6 mm [1/4"] smaller than exact opening dimensions to allow for proper fit.

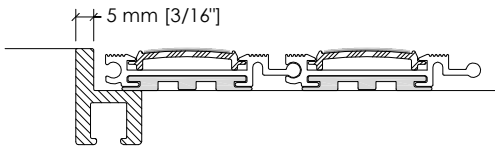

☐ Recessed frame MRF-1002




☐ Recessed frame SSF-125




☐ Surface frame BSF-225

Hinge Details



Ball & Socket Hinge

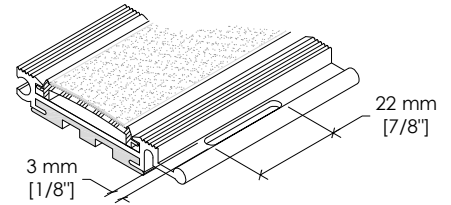

☐ Optional perforated hinge (solid hinge standard)

Optional nosings




☐ Square vinyl nosing



☐ Beveled vinyl nosing

Sectioning information

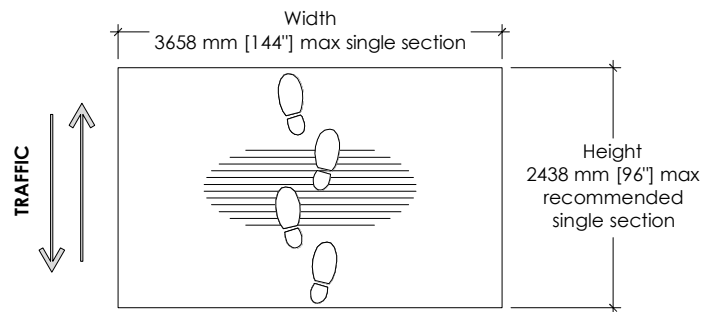

*Mats over 48 square feet require sectioning as determined by the factory

Features

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 3658 mm [144"]
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static coefficient of Friction (ASTM D-2047-82)
Dry : >1.14, Wet : >1.20

Finishes

Aluminum tread and spacer :

- ☐ Mill finish (standard) #405
- ☐ Medium bronze anodized #404
- ☐ Clear anodized #403
- ☐ Black anodized #462

Vinyl cushion : Black

Insert base : Mill finish aluminium #405

Insert : Mill finish aluminium #405, w/an applied manufacturer's standard color abrasive strip

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF # / Contract # : _____

Date : _____