



Optional Framing


* Cometal requires that exact opening dimensions be provided. Factory will fabricate mats 6 mm [1/4"] smaller than exact opening dimensions to allow for proper fit.

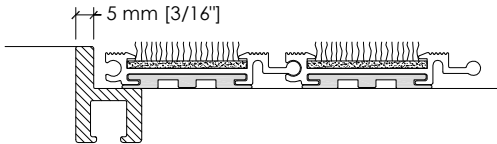

☐ Recessed frame MRF-1002



☐ Recessed frame SSF-125



☐ Surface frame BSF-225

Features

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 3658 mm [144"]
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fiber are waterproof with UV inhibitors for exterior use
- Static coefficient of Friction (ASTM D-2047-82)
Dry : 0.64, Wet : 0.67

Finishes

Aluminum tread and spacer :


- ☐ Mill finish (standard) #405
- ☐ Medium bronze anodized #404
- ☐ Clear anodized #403
- ☐ Black anodized #462

Vinyl cushion : Black


Bristle filament carpet insert :

Manufacturer's standard colors

Hinge Details



Ball & Socket Hinge

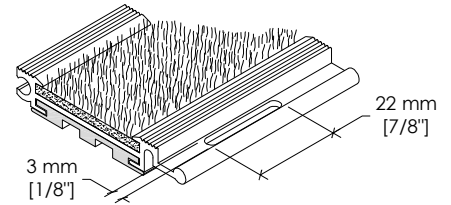

☐ Optional perfored hinge (solid hinge standard)

Optional nosings




☐ Square vinyl nosing



☐ Beveled vinyl nosing

Sectioning information

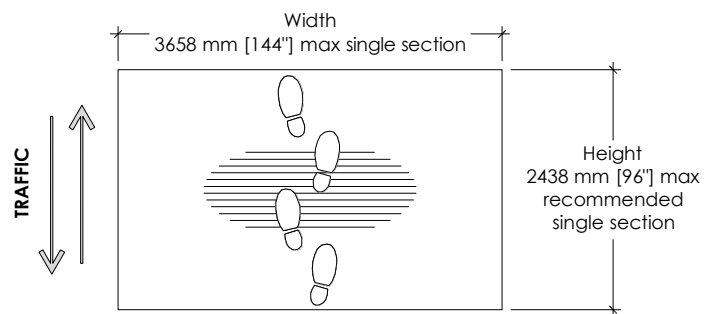

*Mats over 48 square feet require sectioning as determined by the factory

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF # / Contract # : _____

Date : _____