
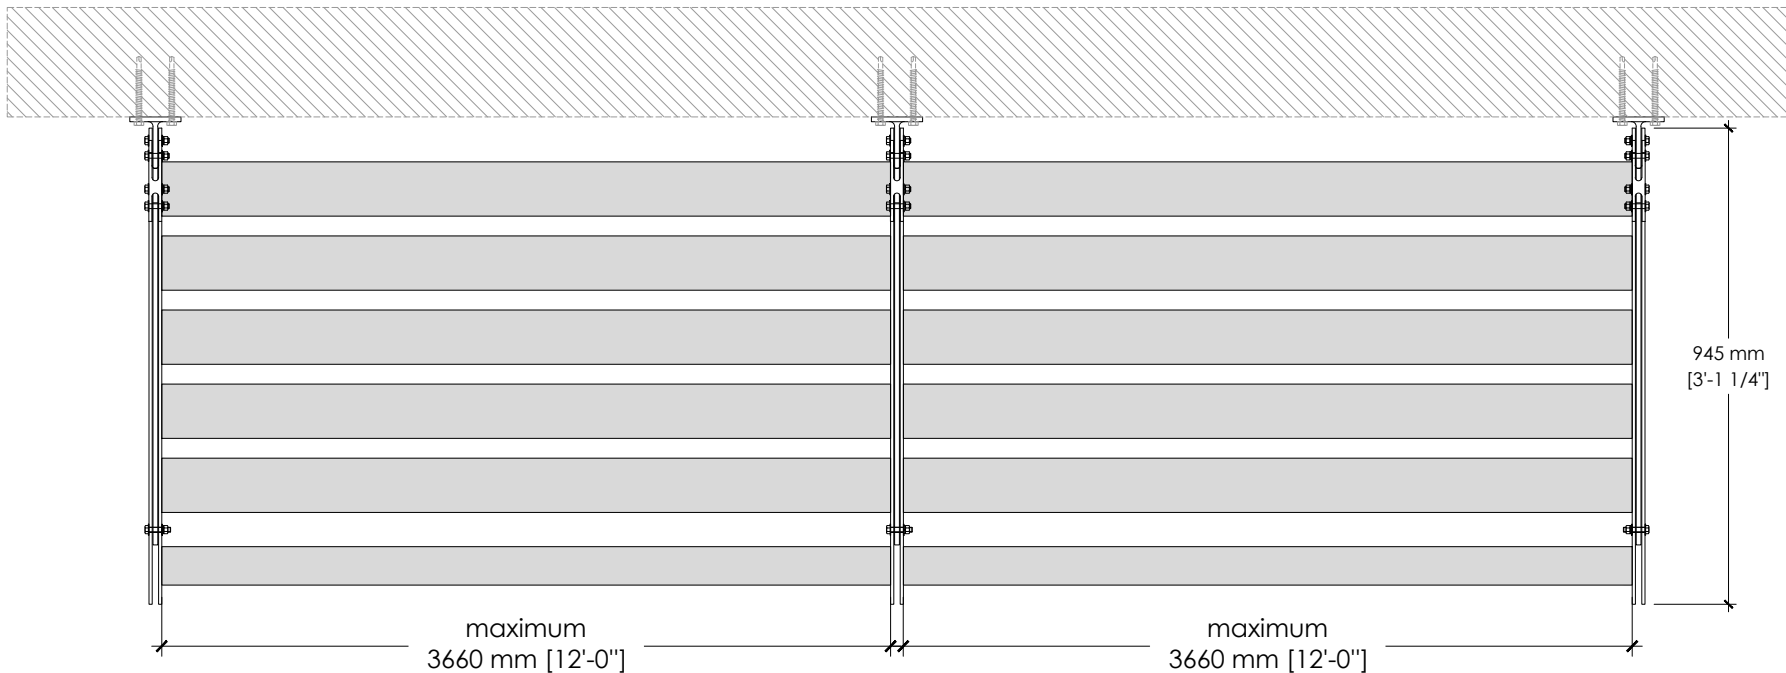


Specifications

Blades	106-45-AF model blades positioned at 45° with round aluminum tube
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	surface anchoring *



* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

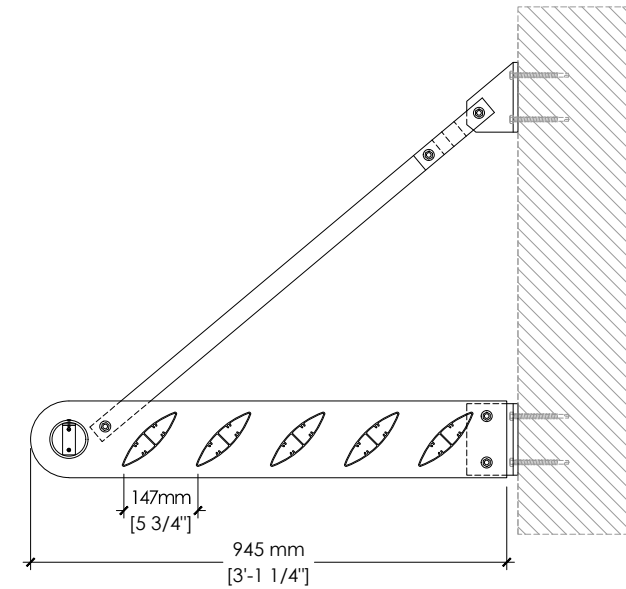

Specifications

Blades	20 x 89 model blades positioned at 45° with double 4U frame
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	surface anchoring *

* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

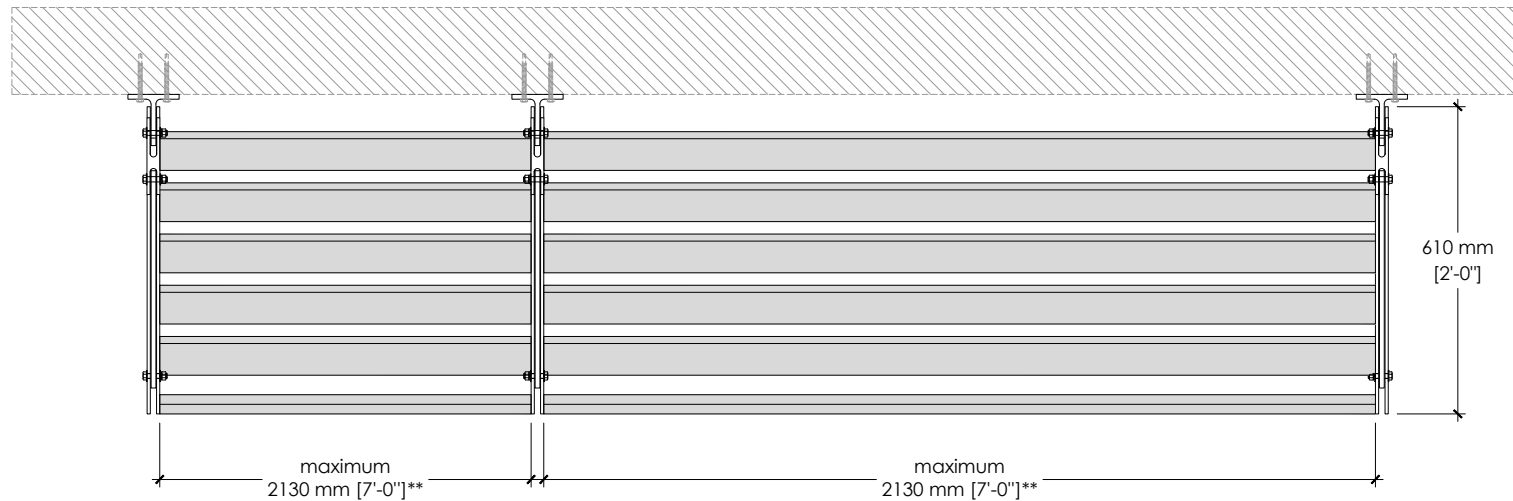
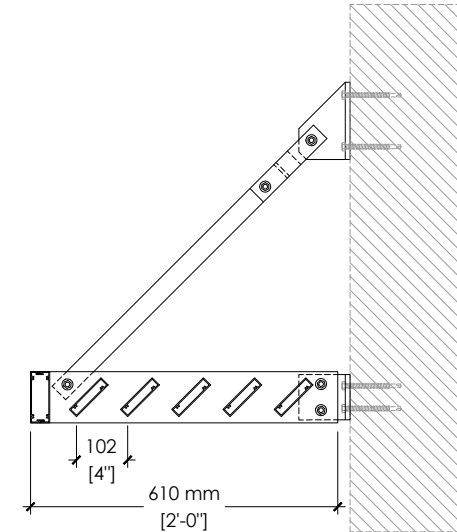


** Maximum blade span when installed at 45°

Specifications

Blades	20 x 89 model blades positioned at 45° with 25 x 140 model blade
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	curtain wall anchoring *

* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

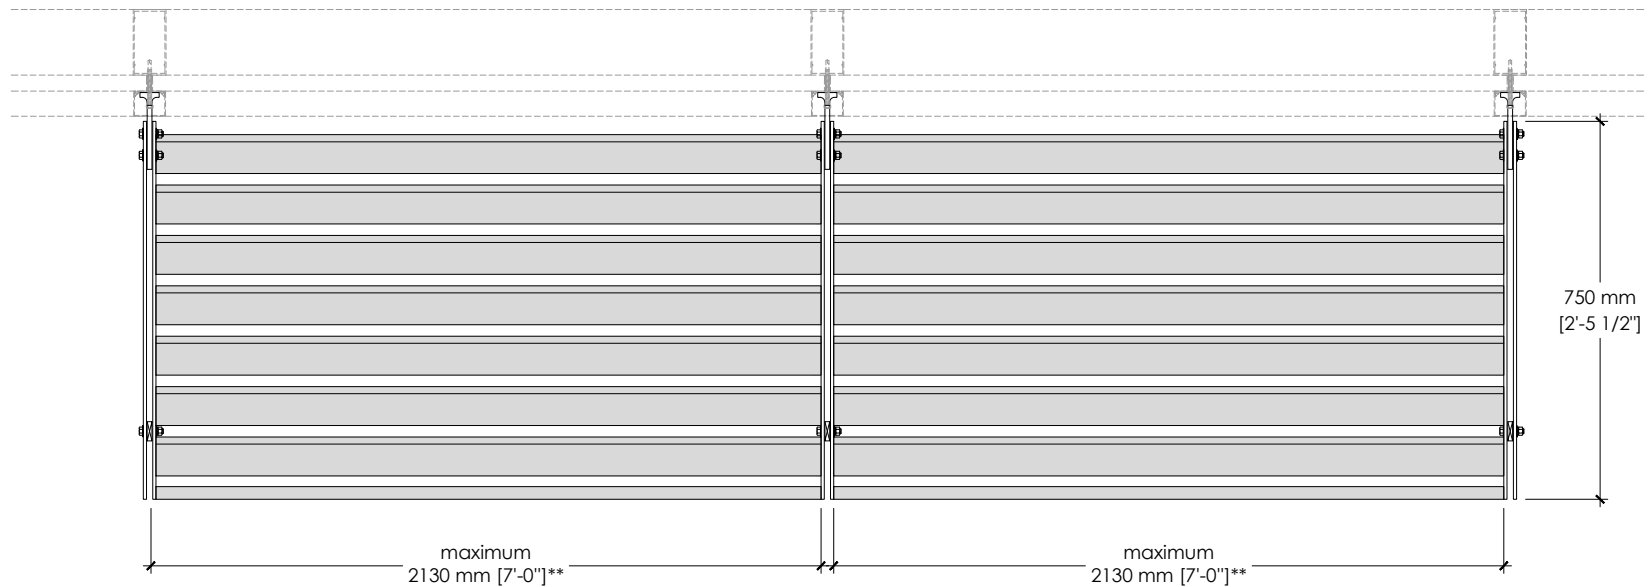
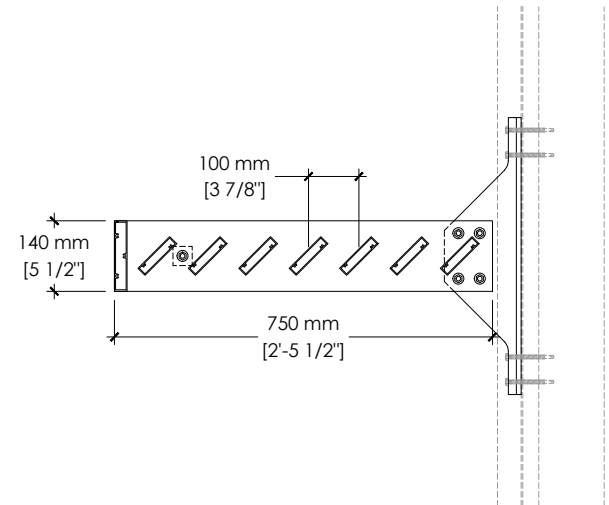


** Maximum blade span when installed at 45°

Specifications

- Blades** 106-45-AF model blades positioned at 35° with round aluminum tube
- Supports** 6,35 mm [1/4"] thick aluminum plate
- Anchors** behind the cladding *



* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

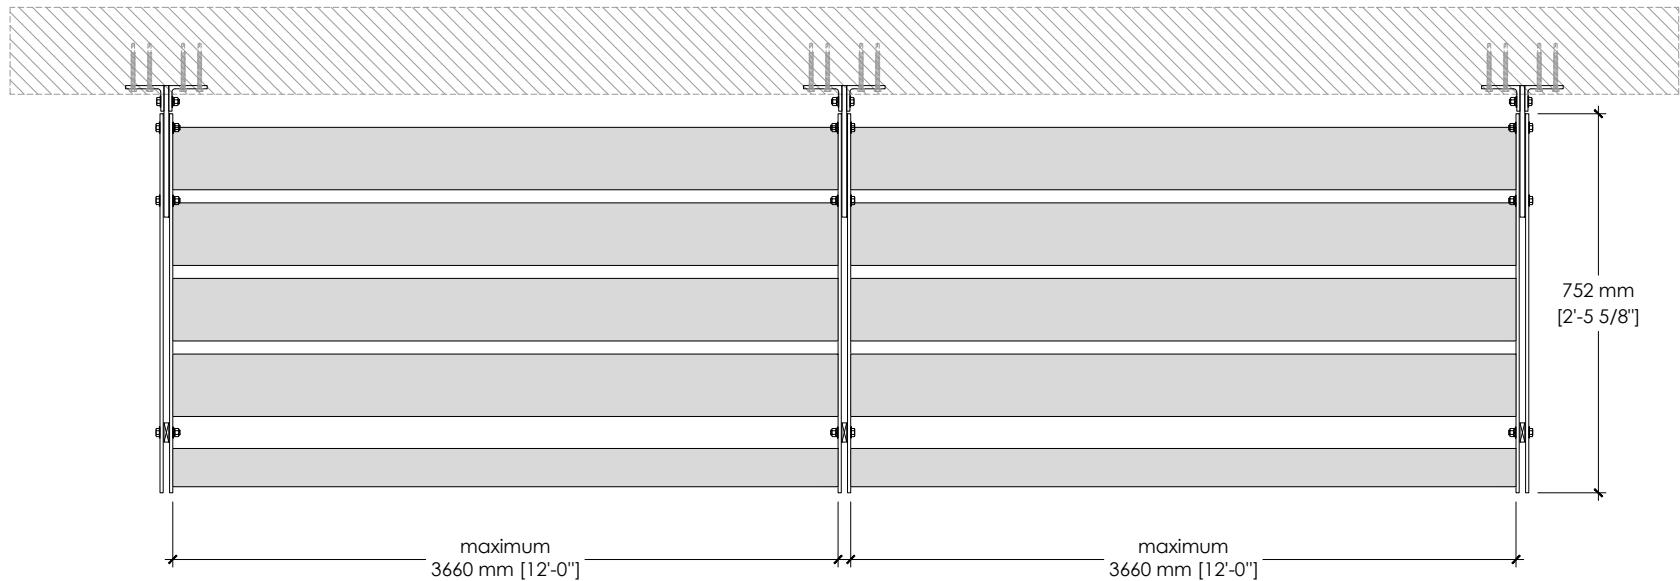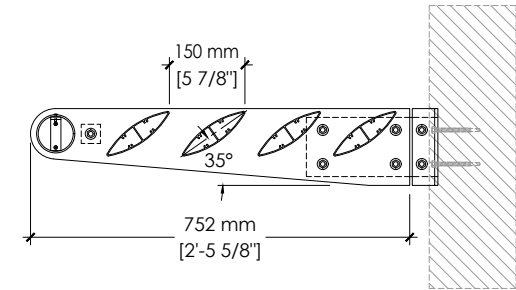

Specifications

Blades	106-07-AF model blades positioned at 45°
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	surface anchoring *



* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

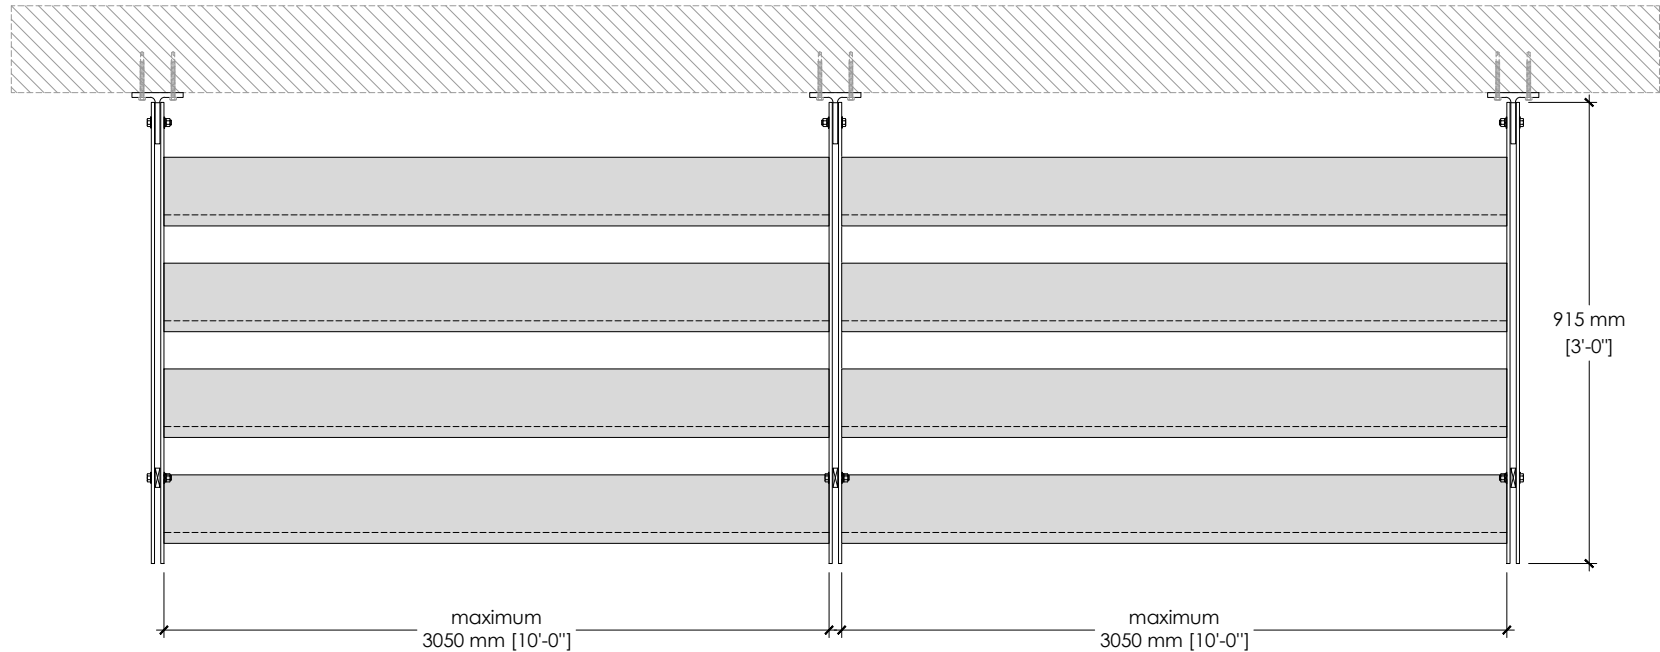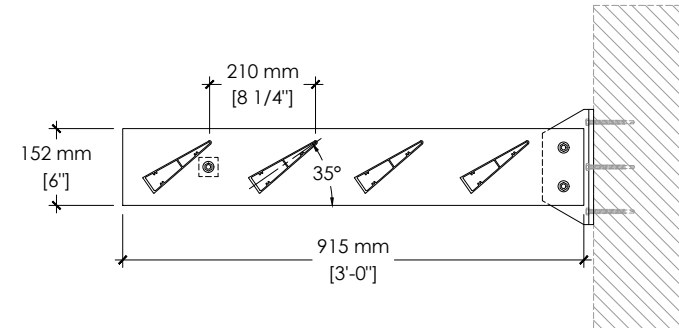

Specifications

Blades	25 x 140 model blades positioned at 45°
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	surface anchoring *

* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

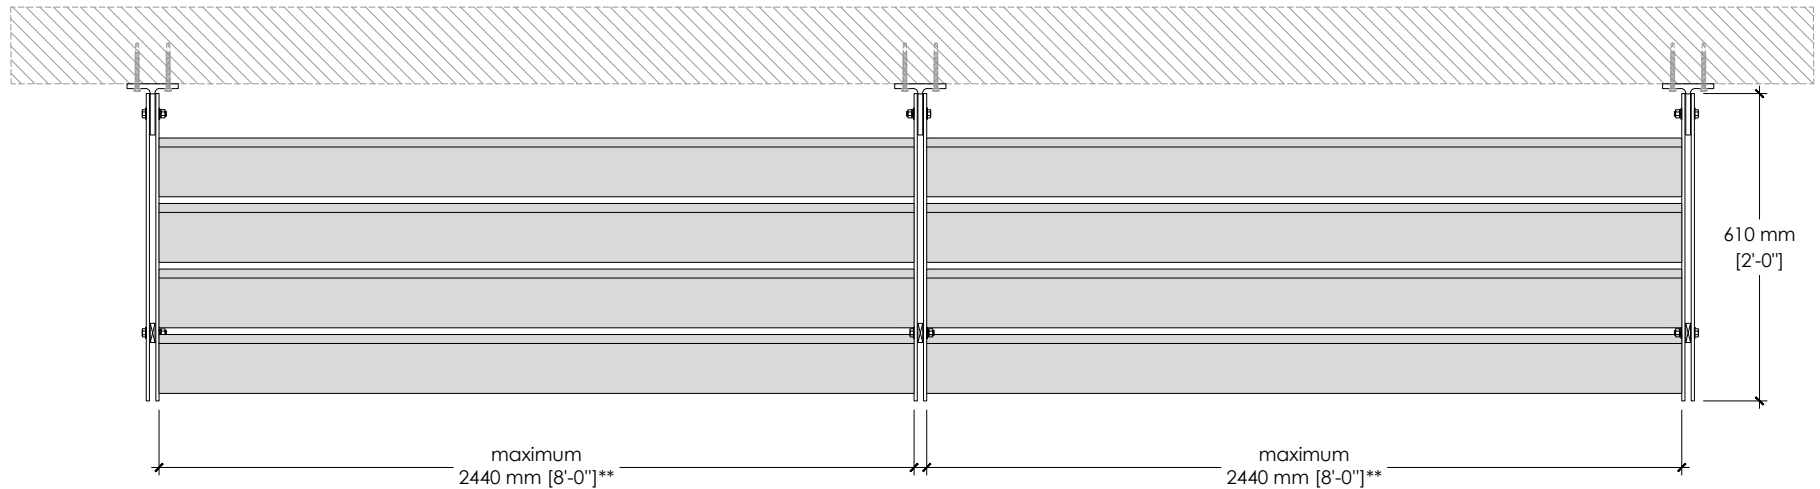
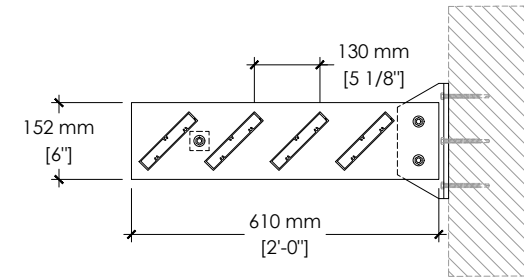


** Maximum blade span when installed at 45°

Specifications

Blades	25 x155-37 model blades with double 8U frame
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	behind the cladding *

* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

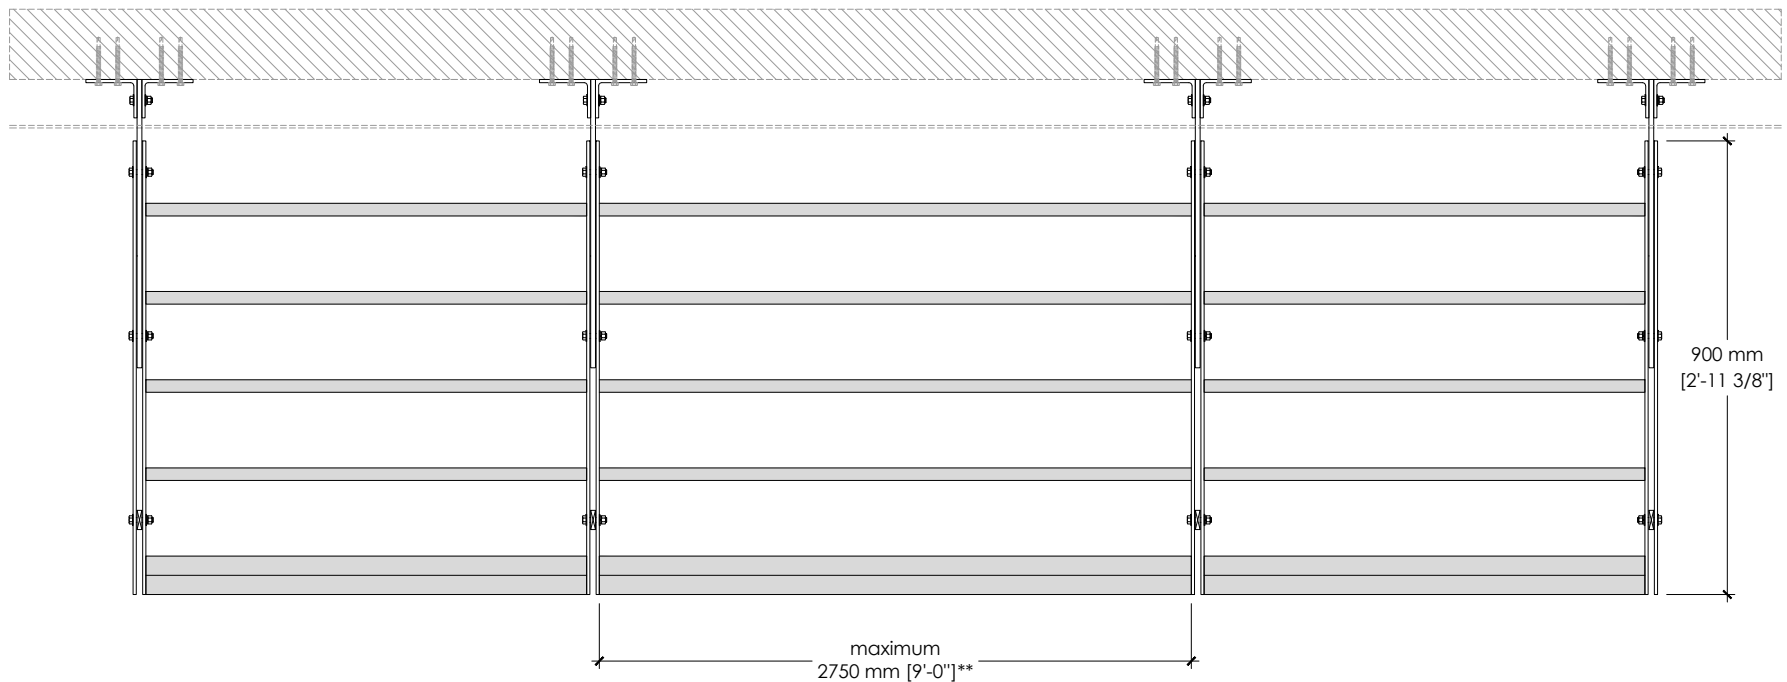
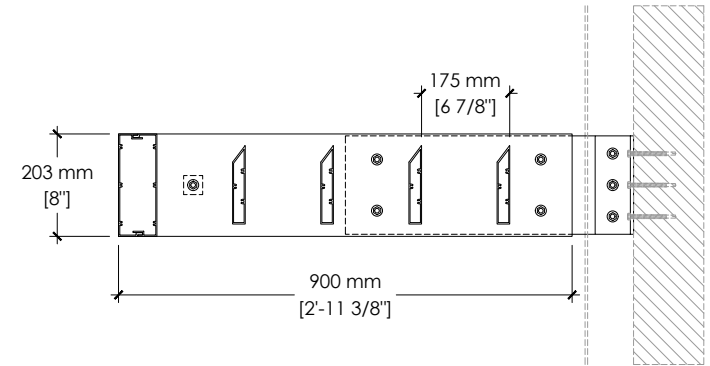


** Maximum blade span when installed vertically

Specifications

Blades	20 x 89 model blades positioned at 90° with round aluminum tube
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	behind the cladding *

* Wall anchors shown for informational purposes only. The final dimensions must be calculated and determined by the engineering department.

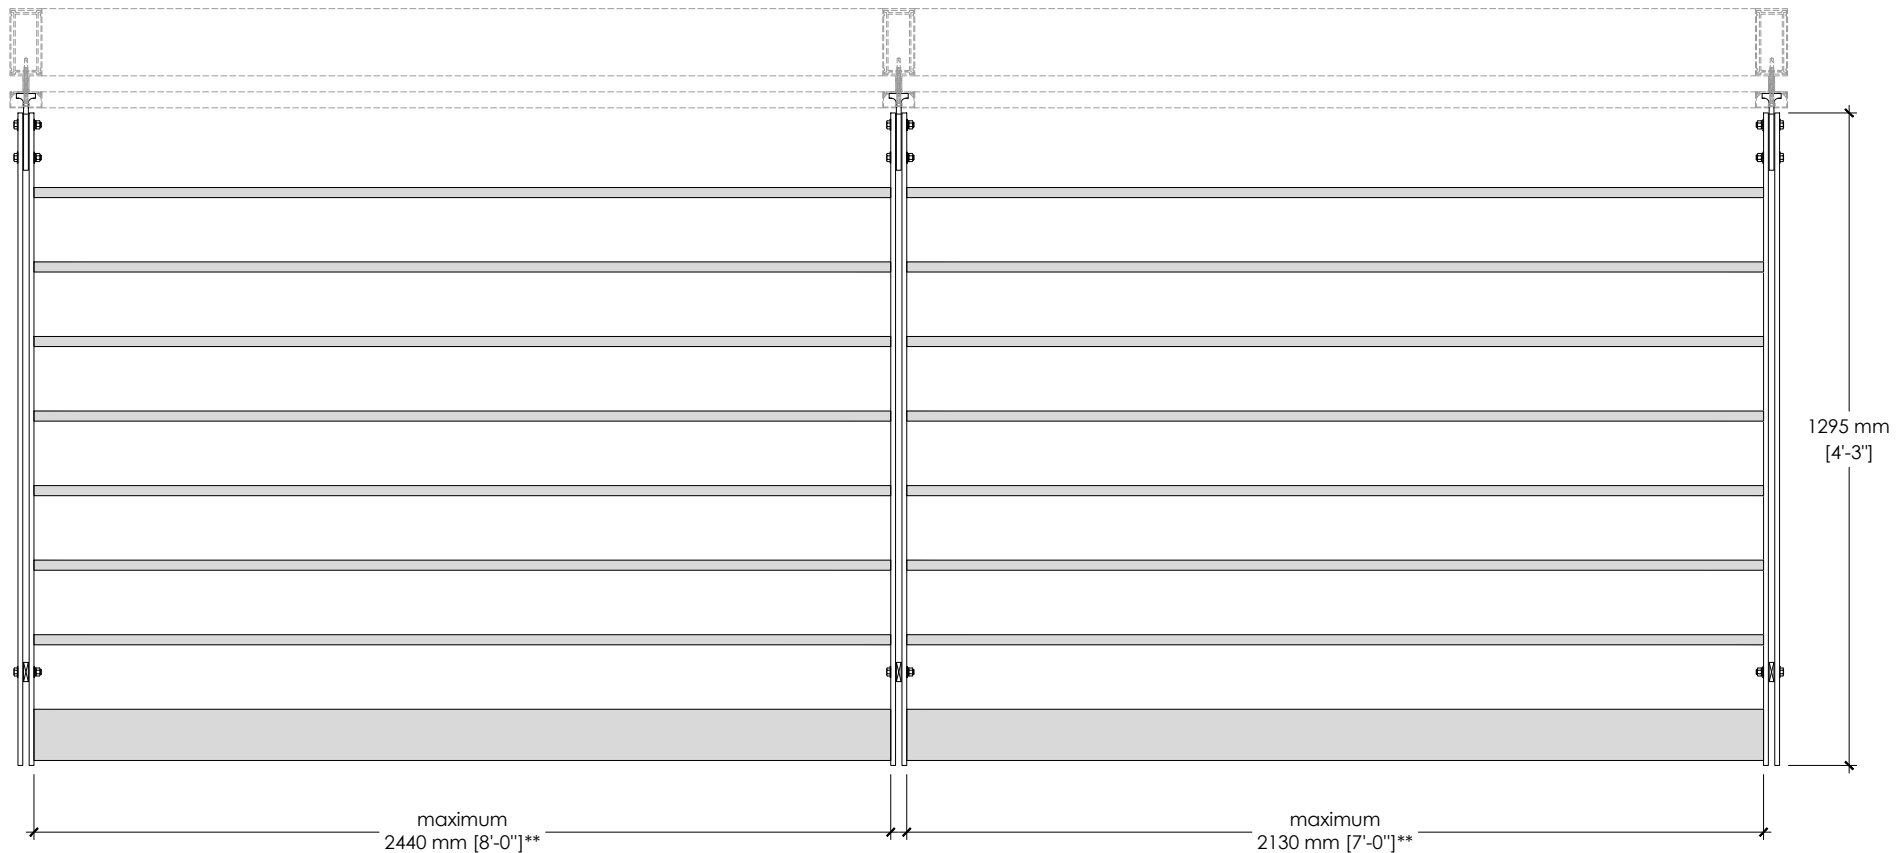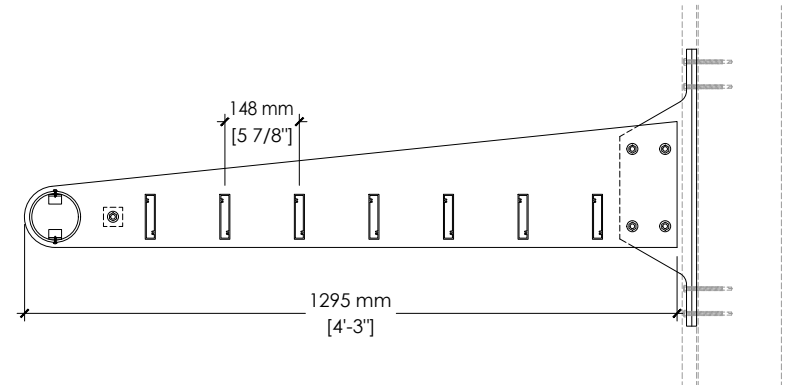

** Maximum blade span when installed vertically