

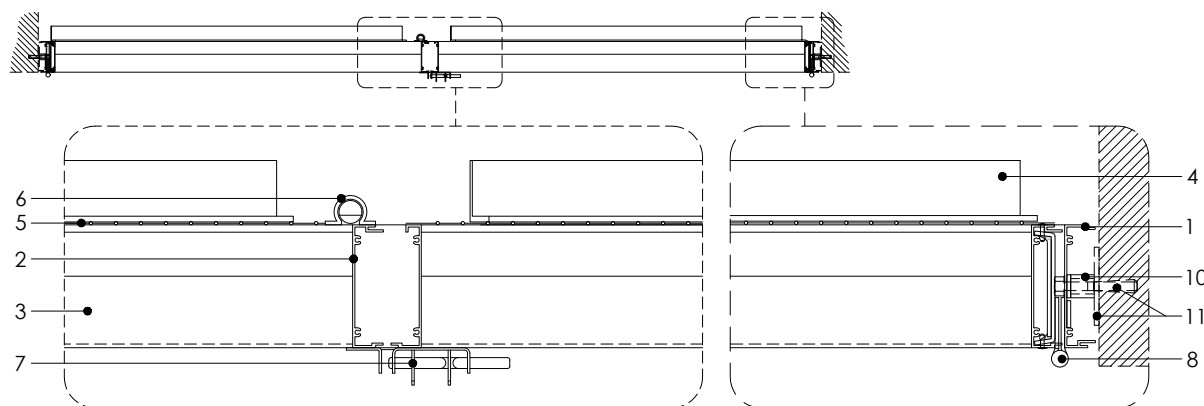
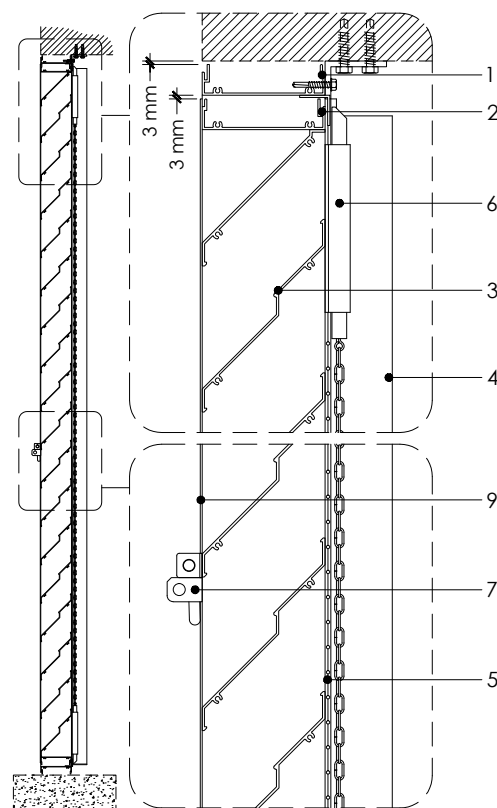


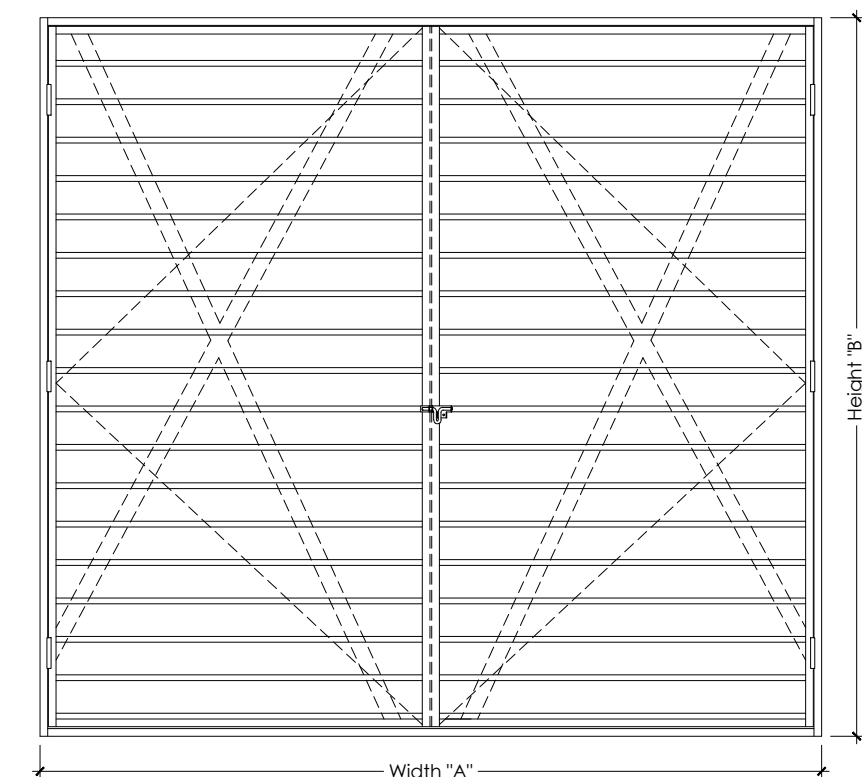


Material

- 1 - Perimeter frame in extruded aluminum
- 2 - "U" doorframes in extruded aluminum
- 3 - Blades in extruded aluminum (See available models)
- 4 - Aluminum angle braces, 51 x 51 x 4,7 mm [2" x 2" x 3/8"]
(installed diagonally for doors less than 915 mm [36"] and in an "X" for doors greater than 915 mm [36"])
- 5 - Birdscreen (optional)
- 6 - Chain latch
- 7 - Padlockable stainless steel lock
- 8 - Stainless steel hinge
- 9 - Astragal
- 10 - Aluminum plate and ring
- 11 - Shim and installation screws (provided by the installer)

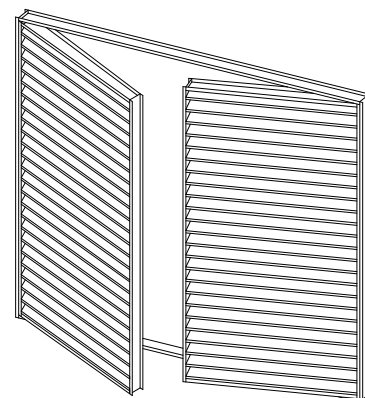


Available configuration


(For information only)



☐ Option A

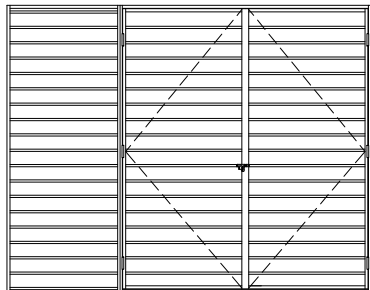

☐ Option B

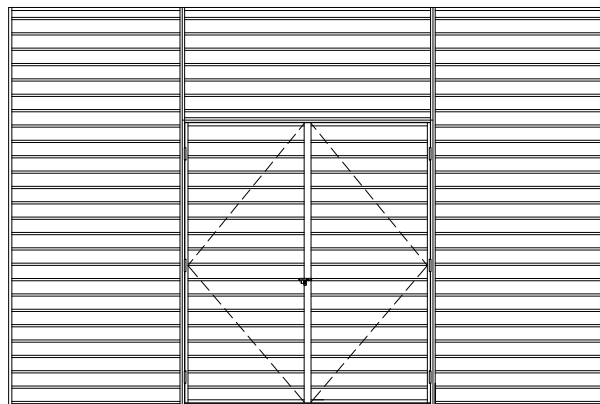

☐ Option C

Available finish

- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating *
- ☐ Liquid super durable coating *
- ☐ Duranar baked enamel *
- ☐ Duranar XL baked enamel *
- ☐ Powder coating *

Color : _____

* Painted on surface visible from the outside only

Available perimeter frames

☐ "L" frames

☐ "U" frames

Available models

- | | | |
|-------------------------------------|------------------------------------|-----------------------------------|
| ☐ 101-35R ** | ☐ 201-30 ** | ☐ 404-V |
| ☐ 101-45 ** | ☐ 202-45 ** | ☐ 404-40 |
| ☐ 102-45 ** | ☐ 204-30 | ☐ 404-40-D |
| ☐ 104-30 | ☐ 204-37 | ☐ 104-35D |
| ☐ 104-45 | ☐ 204-45 | ☐ 104-45D |
| ☐ 106-45 | ☐ 204-45-3 | ☐ 106-35D |
| | ☐ 206-45 | ☐ 106-45DD |

** 50 mm (2") models and smaller are available with 100 mm (4") deep frame only.

☐ Outside dimensions

☐ Opening dimensions

Bridscreens and accessories

- ☐ Galvanized steel birdscreen (standard)
- ☐ Expanded aluminum birdscreen
- ☐ Woven aluminum birdscreen
- ☐ Stainless steel birdscreen
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Birdscreen frame
- ☐ Non-insulated obturating panel 0,8 mm [0,032"]
- ☐ Insulated obturating panel 50 mm [2"]

Finish : _____

Color : _____

☐ Others : _____

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF / # PO : _____

Date : _____

Item	Qty	Dimensions		Clearance (6 mm (1/4") minimum recommended)
		Width "A"	Height "B"	