
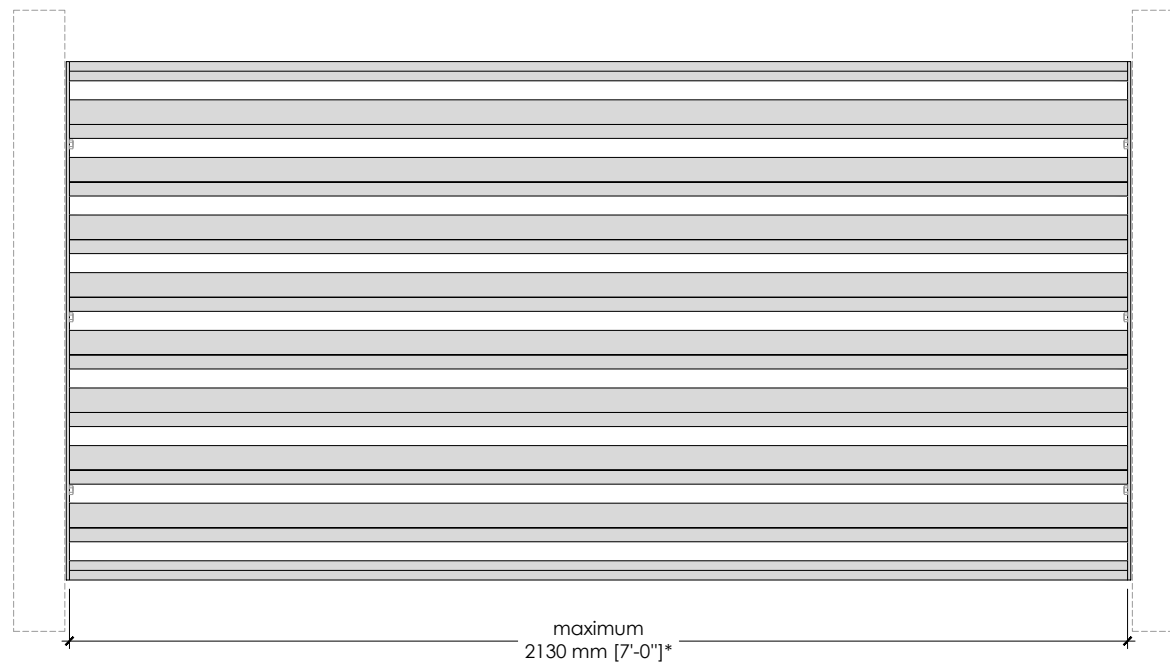


Specifications



Blades	20 x 89-45 blades model positioned at 45° with double 4U frame
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	surface anchoring

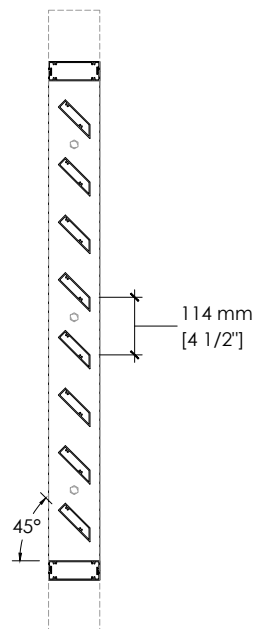

* Maximum blade span when installed at 45°

Specifications


Blades	20 x 89-45 blades model positioned at 20°
Supports	double 4U frame model
Anchors	surface anchoring

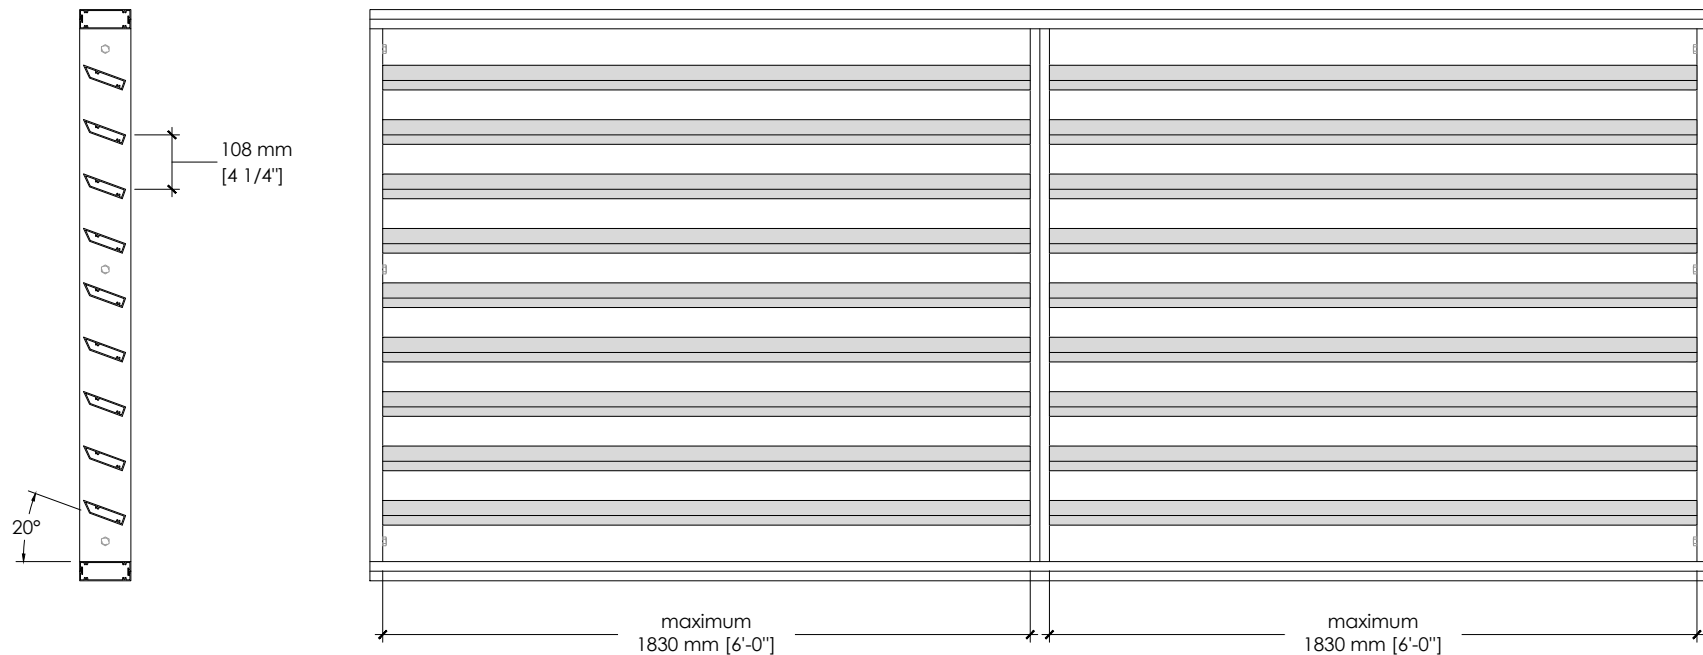

* Maximum blade span when installed less than 45°

Specifications



Blades	20 x 89-45 blades model
Supports	aluminum angle
Anchors	surface anchoring

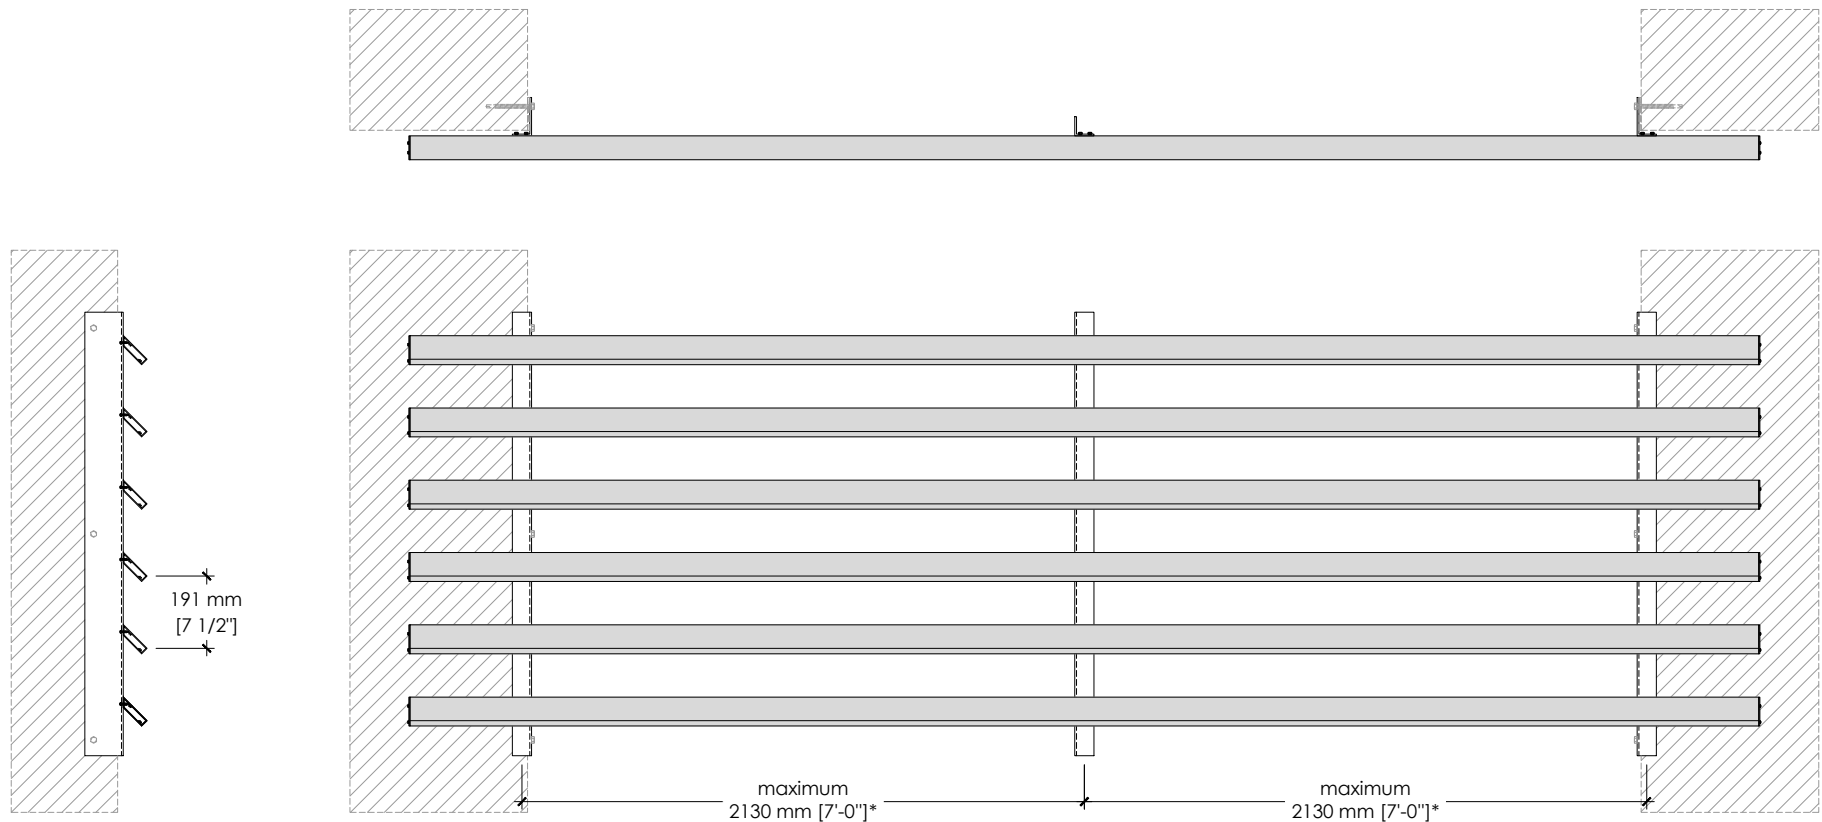

* Maximum blade span when installed at 45°

Specifications


Blades	20 x 89 blades model positioned vertically
Supports	aluminum angle
Anchors	curtain wall anchoring

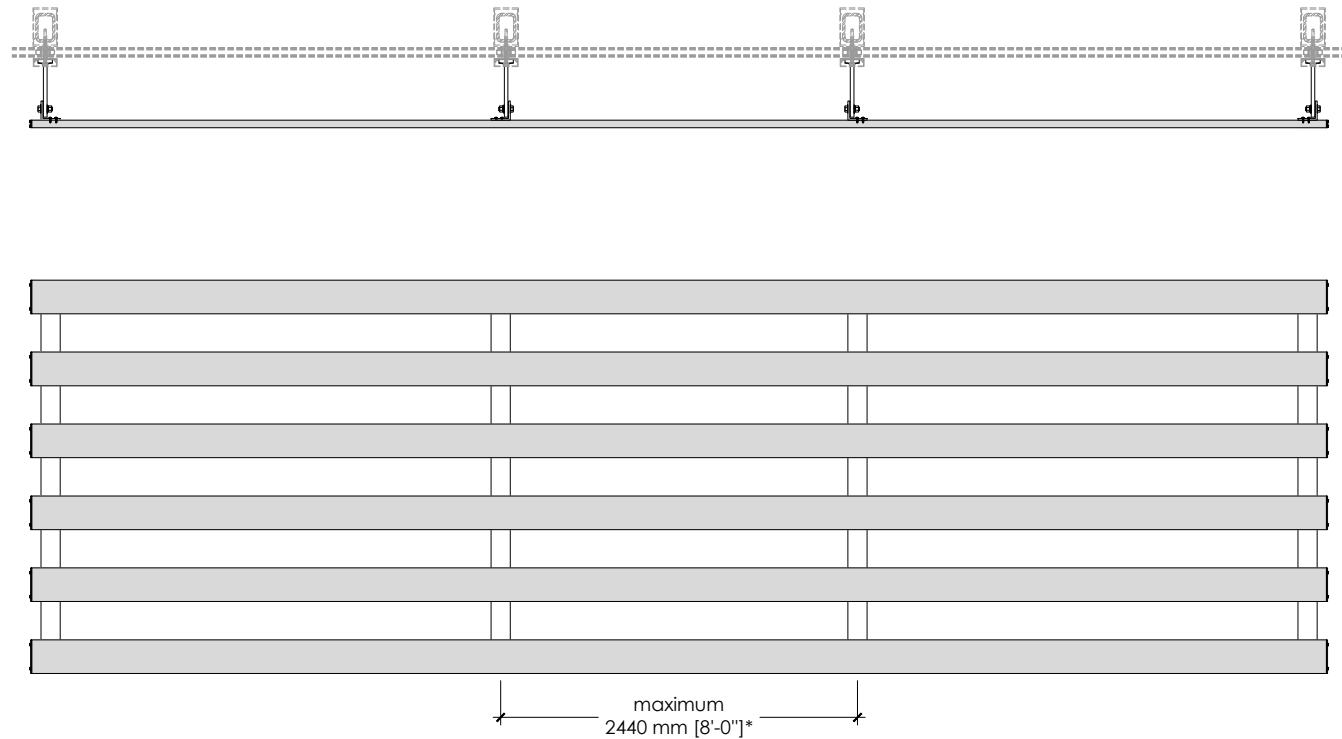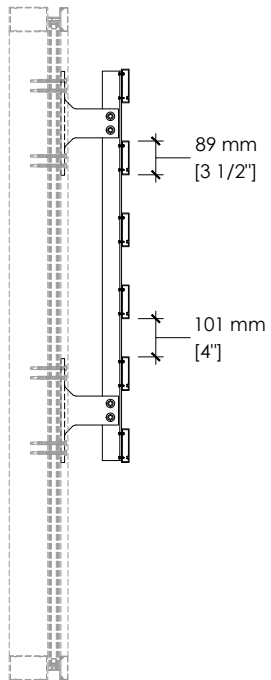

* Maximum blade span when installed vertically

Specifications




Blades	25 x 155-37 blades model
Supports	aluminum angle
Anchors	surface anchoring

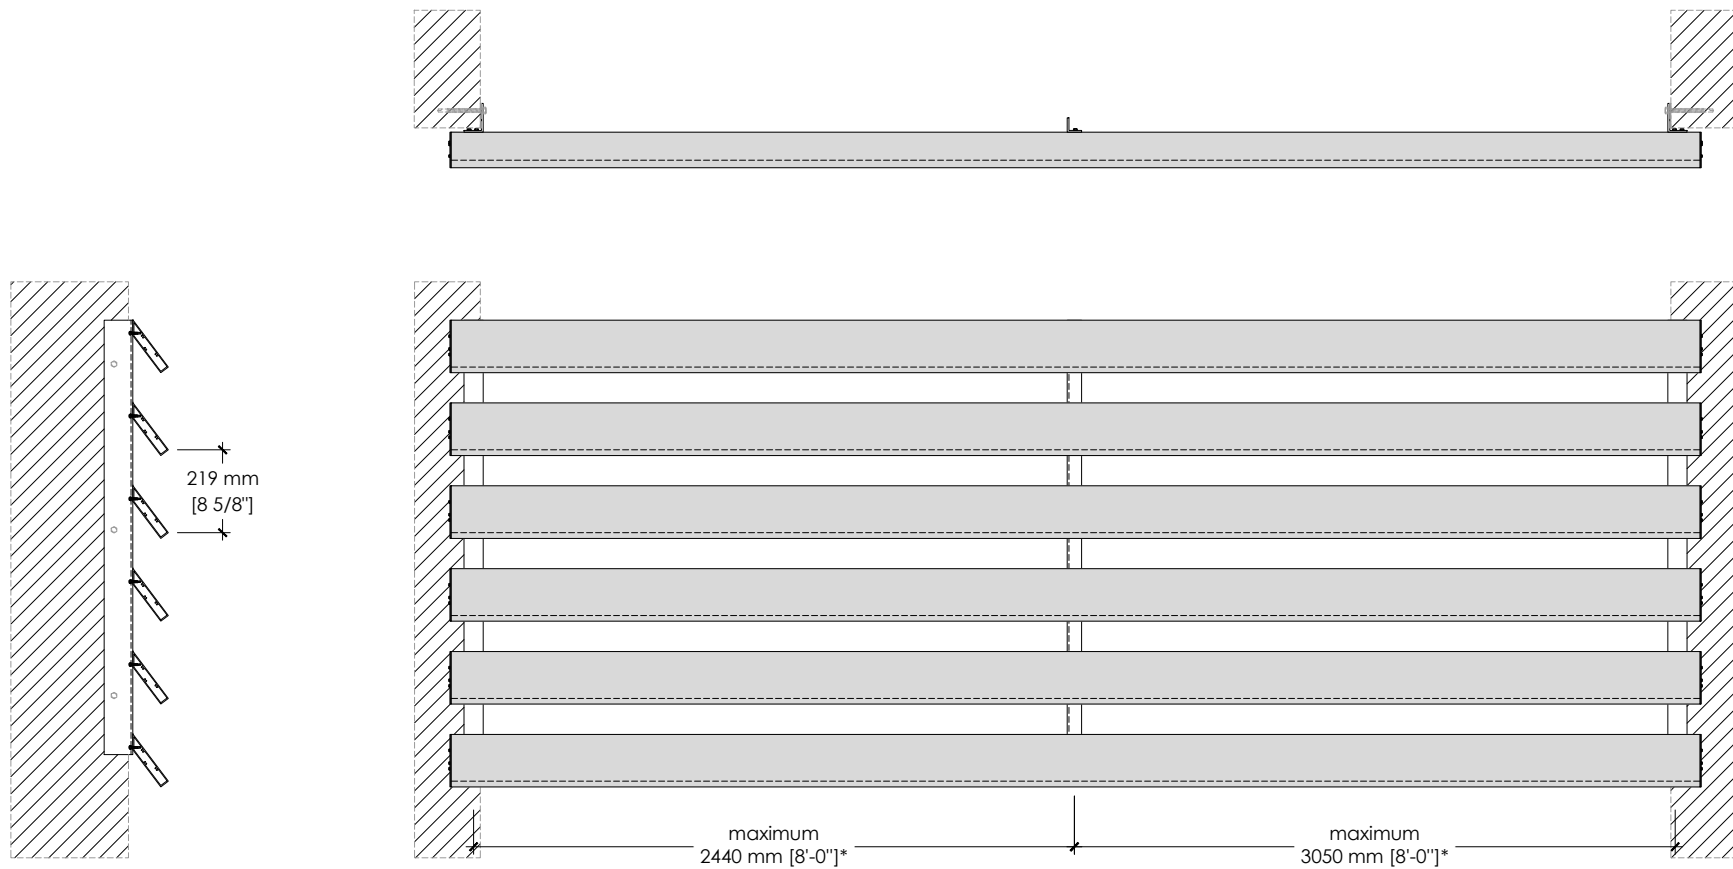

* Maximum blade span when installed at 37°

Specifications



Blades	25 x 140 blades model with double 6U frame
Supports	aluminum angle
Anchors	curtain wall anchoring

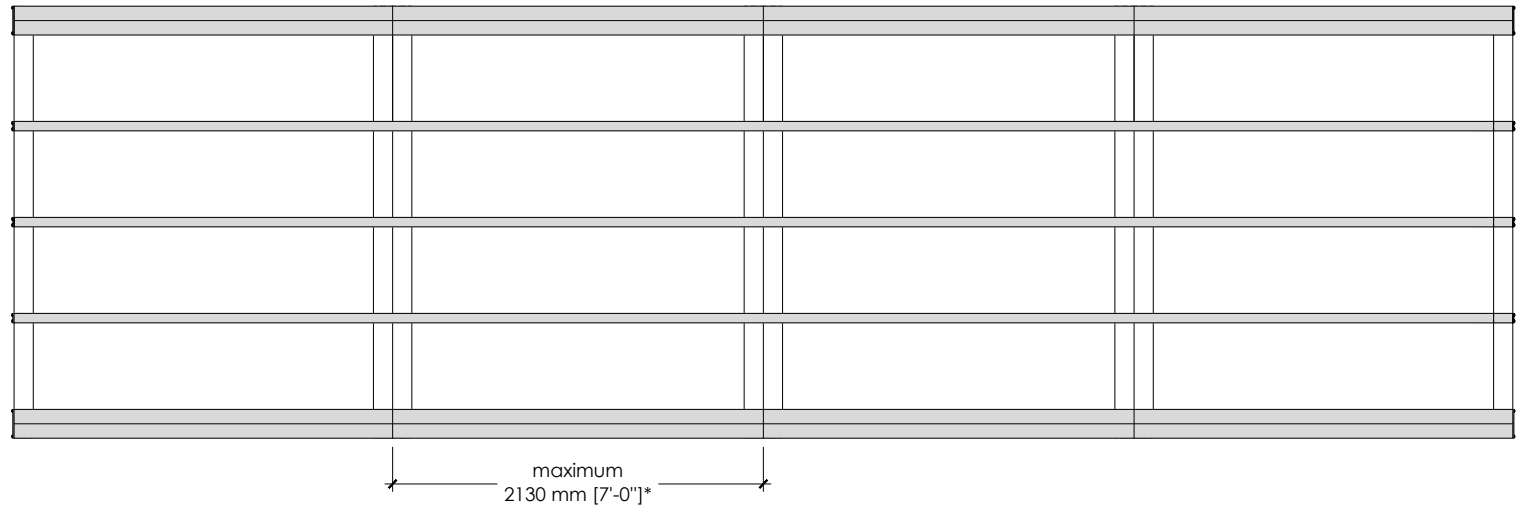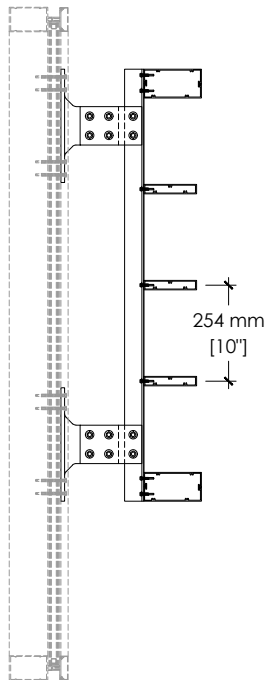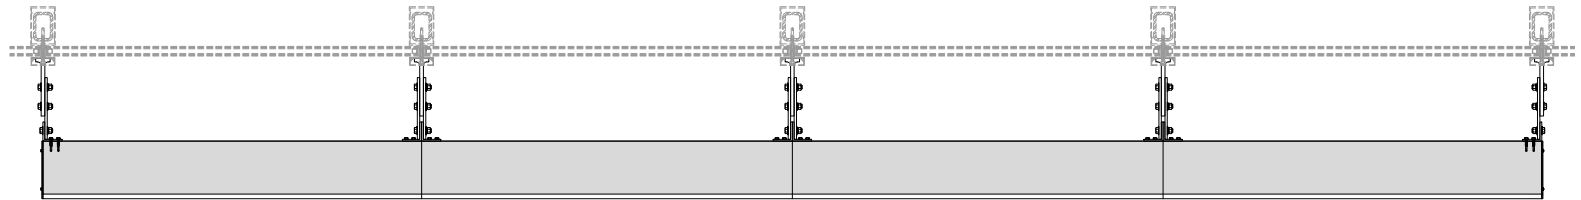

* Maximum blade span when installed horizontally

Specifications



Blades	25 x 140 blades model
Supports	double 6U frame model
Anchors	surface anchoring

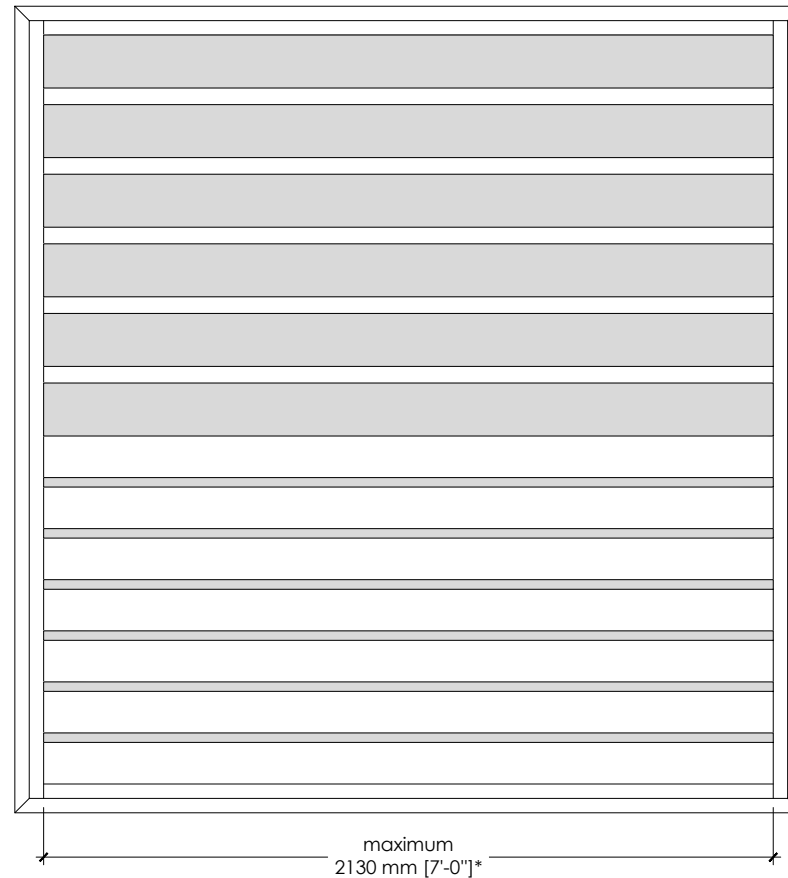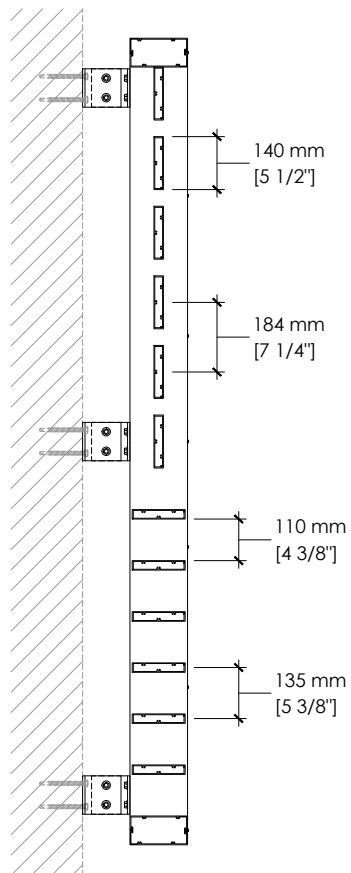

* Maximum blade span when installed horizontally


Specifications

Blades	106-07-AF blades model
Supports	aluminum angle
Anchors	curtain wall anchoring

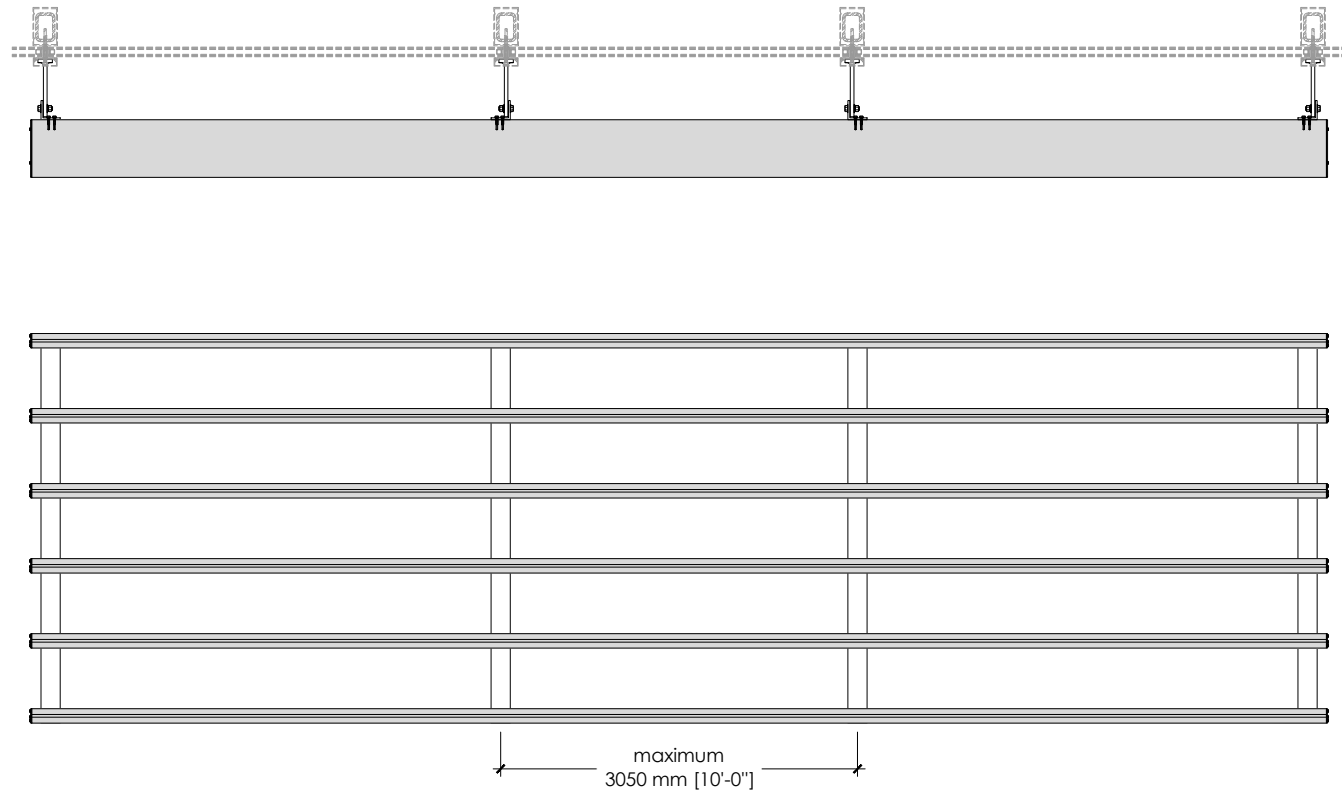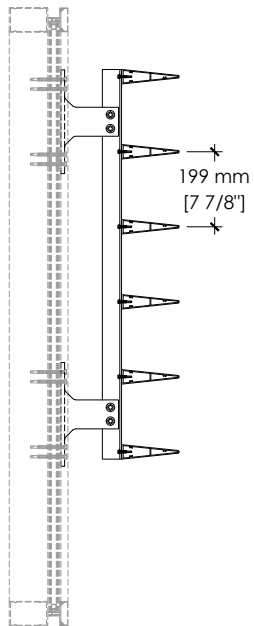

Specifications

Blades	108-07-AF blades model positioned at 45°
Supports	6,35 mm [1/4"] thick aluminum plate
Anchors	behind the cladding

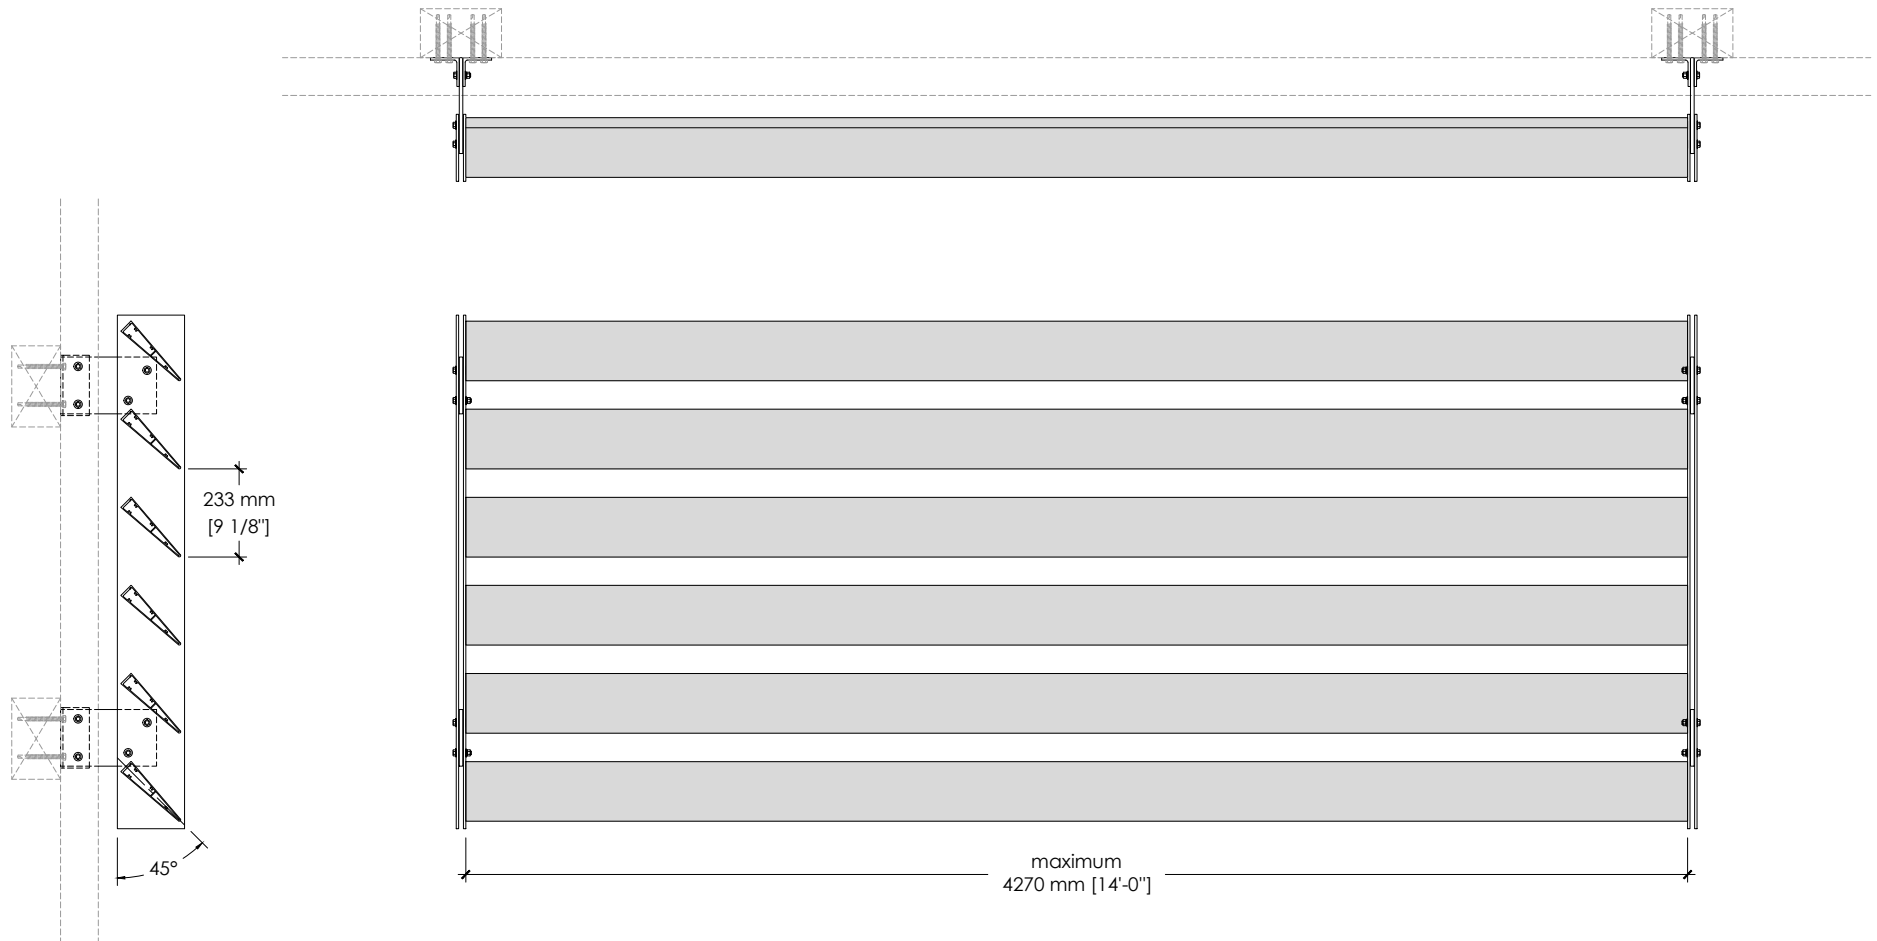

Specifications

Blades	106-45 AF blades model positioned at 45°
Supports	double 4U frame model
Anchors	curtain wall anchoring

