



Specifications

- Material :** Aluminum 6063-T5, 14 gauge
1,6 mm [0.064"] thick.
- Inside :** 50 mm [2"] thick acoustic insulation
covered with a galvanized steel sheet
22 gauge and perforated at 50%.
- Birdscreen :** Galvanized steel birdscreen 0,81 mm [0,032"] gauge
12 x 12 mm [½" x ½"] mesh.
- Assembly :** Mechanical assembly (no welding) with unpainted
stainless steel screws every 100 mm [4"].

Finish

- ☐ Mill finish
- ☐ Anodized clear 10 microns
- ☐ Liquid super durable coating*
- ☐ Acrylic polyurethane coating*
- ☐ Duranar baked enamel*
- ☐ Duranar XL baked enamel *

Color : _____
* Painted on surfaces visible from the outside only

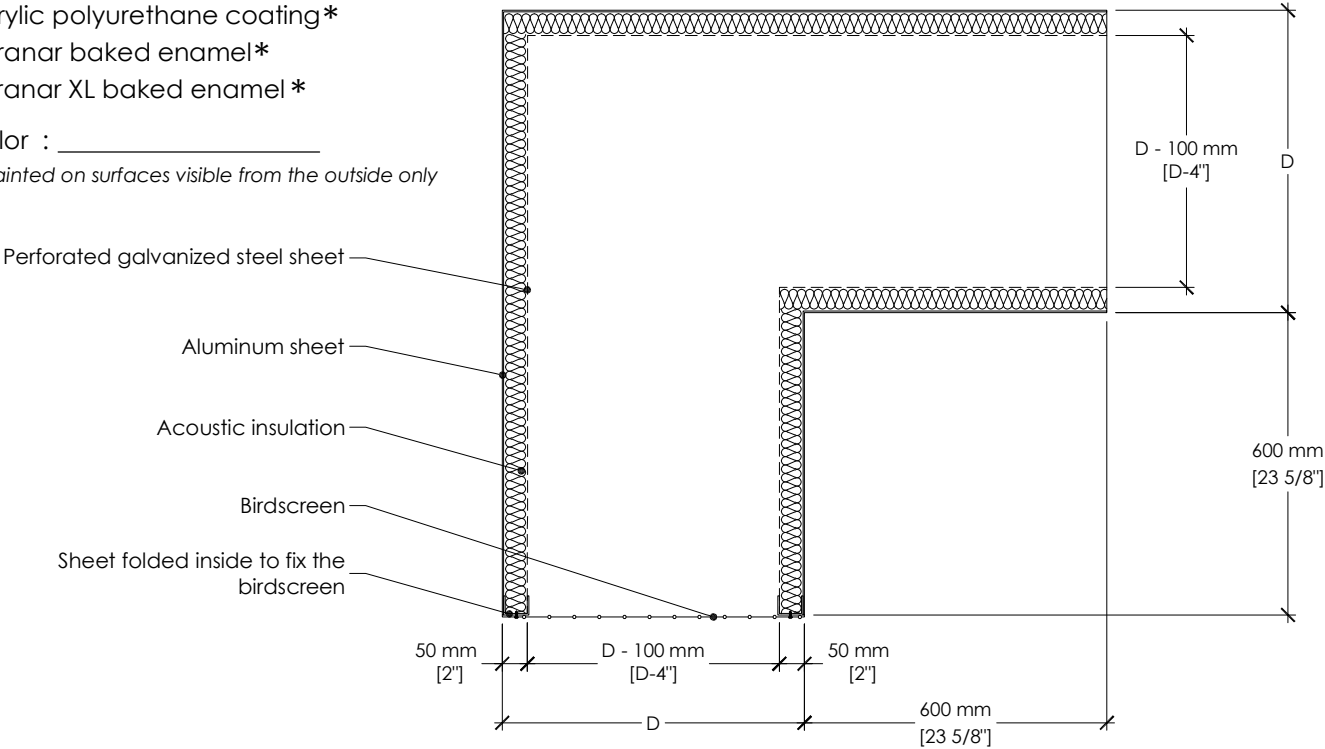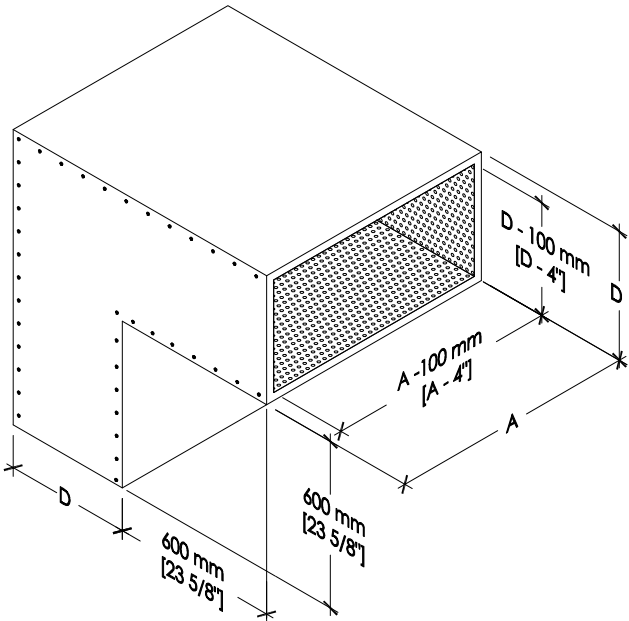

Qty	Outside dimensions		Inside dimensions	
	A	D	A-100 mm [A-4"]	D-100 mm [D-4"]

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF # / PO # : _____

Date : _____